
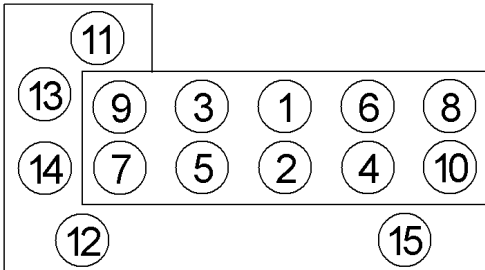


Anziehvorschrift für Zylinderkopf		423.590		 Das Original
Tightening Instructions for Cylinder Head		passend für / suitable for		
Instructions de serrage pour culasse		adaptable à / adaptable a		
Prescripciones de apriete para culatas		Nissan		
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo				Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
 709.940 M 10 x 96				
Anziehen/ Tightening/ Serrage/ Apriete		POS. 1 - 10 25 Nm 59 Nm ☐ 29 Nm ➤ 50° - 55°		POS. 11 - 15 * 6,8 - 8 Nm
Zeichenerklärung / Explanations / Explication / Explicacion				
*	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 75mm; 1/2: 1,2mm				
Mot: GA14DE, GA14DS 1,4 ltr. 55-64 kW (75-87 PS)				
Almera I, Sunny III				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*423.590*	