
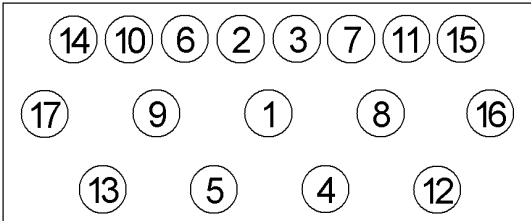


Anziehvorschrift für Zylinderkopf	436.630	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		

Schraubenkopf / Head shape
Tête de vis / Cabeza de tornillo

Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete



- Anziehen/
Tightening/
Serrage/
Apriete
- ✱

➤

➤

✱

●

➤
- 40 Nm
100°
100°
15 min
120 min
45°

Zeichenerklärung / Explanations / Explication / Explicacion

✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
✱	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

96,5 mm Ø, -/1,48 mm ÷

Citroën
CX 2500 Diesel Mot.M 25/629/660 ab 1978>
2500 ccm 55 kW (75 PS)
C 25 Diesel Mot.U 25/651/661 ab 11/1981>