
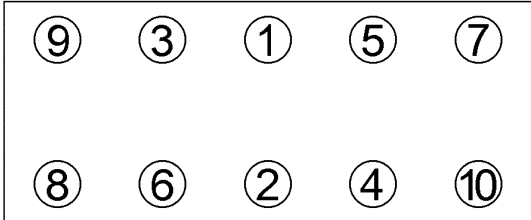


Anziehvorschrift für Zylinderkopf		864.210 passend für / suitable for adaptable à / adaptable a Nissan	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
 710.020 M 11 x 118			
Anziehen/ Tightening/ Serrage/ Apriete	* 39 Nm 83-93 Nm □ 39 Nm ► 75°-80°		
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ►	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 86 mm; $\frac{1}{16}$: 1,25 mm;			
Mot: CD20 2,0 ltr. 55 kW (75 PS) Almera I 1995-2000 Primera 1990-1996 Sunny III 1990-2000			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*864.210*	